

SHANTUI

SG21-B6

Motor Grader



Engine Model: Cummins 6CTAA8.3-C215

Gross Power: 160kW @ 2200rpm

Operating Weight: 17000kg

We Level Subgrade Fast and Flat
easy operation and maintenance

SG21-B6 SPECIFICATIONS

ENGINE

Model	Cummins 6CTAA8.3-C215
Number of cylinders	6
Type	4-cycle, direct injection, water-cooled
Bore x stroke	114*135mm
Displacement	8.3L
Gross power	160kW @ 2200rpm
Max. traction	93.3kN
Max. torque	980N.m @ 1500rpm
Rated fuel consumption	223g/kW.h
Emission	China-II

POWER TRAIN

Transmission	Fixed-axistype,electro-hydrauliccontrol
Torque converter	Single-stage,single-phase,threebasicelements
Rear axle	Modular,planetaryreduction,"no-Spin"anti-skid differential
Tandem drive	Roller chain. Oscillating angle:±15°
Tire	17.5-25PR12
Front axle	Oscillating angle:±16° Tilting angle:±18°

STEERING

Type	Hydraulic power
Front wheel steering angle	±50°
Articulation angle	±23°
Min. turning radius	7500mm

BRAKES

Service brake	Drumtype,foot operated,single circuit,hydraulicallyactuatedonfourtandemwheels
Parking brake	Drum type, manually actuated

MOLDBOARD

Rotation	360°
Moldboard width	3660/3965/4270mm
Moldboard height	620mm
Moldboard thickness	20mm
Moldboard tip angle	22~73°
Max. cutting depth	970mm
Max. lifting height	480mm
Max. shoulder reach (left/right)	1900/1950mm
Max. tilting angle (left/right)	±90°

SPEED

Forward,1-6	5.5\9.1\12.2\20.7\26.5\39.2km/h
Reverse,1-3	5.3\12.4\26.1km/h

HYDRAULICS

Tandem pump	Gearpump.32ml/r\Pistonpump75ml/r
Reliefpressureforworkingequipment	18MPa / 24MPa
Relief pressure for steering	16.5MPa
Relief pressure for brakes	10MPa

CAPACITIES

Fuel tank	360L
Hydraulic oil tank	85L
Engine crank case	19L
Engine coolant	33L

ELECTRICAL SYSTEM

Battery	2x12V,105Ah
Alternator	28V,70A
Starter motor	24V,6kW

OPERATING WEIGHT

Standard	17000kg
With front blade	17860kg
With rear ripper	18450kg
With front blade & rear ripper	18900kg

RIPPER (OPTIONAL)



Ripping depth	425mm
Shank supports	5
Shank support spacing	520mm
Working width	2080mm

FRONT BLADE (OPTIONAL)

Width x height	2740x890mm
Thickness	12mm
Max. lifting height	660mm
Max. digging depth	425mm

DIMENSIONS

A Overall length: Standard	9700mm
A Overall length: With rear ripper	11050mm
A Overall length: With front blade	10380mm
A Overall length: With front blade & rear ripper	11140mm
B Length: Front axle to mid tandem	6560mm
C Length: Between tandem axles	1550mm
D Height: Cab	3358mm
E Tread	2155mm
F Width: Outside tires	2600mm
G Moldboard width	3660/3965/4270mm
H Minimum ground clearance	400mm

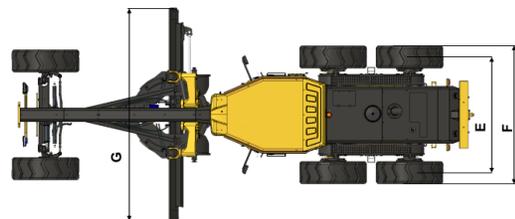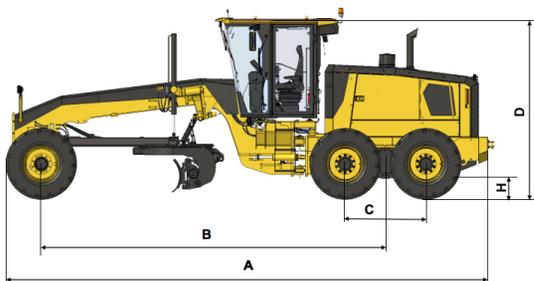

*THISPECIFICATIONSARESUBJECTTOCHANGEWITHOUTNOTICE.THEPICTURESMAVINCLUDEOPTIONSTHEACTUALCOLOR&APPEARANCEOFTHEPRODUCTMAYDIFFERFROMWHATISSHOWN.



Shantui Social

SHANTUI CONSTRUCTION MACHINERY CO., LTD.
ADD: No. 58, G327 Highway, Jining City, Shandong, CHINA
TEL: +86-537-2909369
FAX: +86-537-2311219
EMAIL: trade@shantui.com
WEB: www.shantui.com

SHANTUI
LET'S MAKE CONSTRUCTION EASIER

2023-V1.0